

DESCRIPTION

8" wide band speaker, 15 W, 8 Ohm (max. 25W) with support ring with clamps. It can be flush-mounted in box P4903 or on false ceiling, with the built-in clamps.

CONNECTION

STRIP TERMINALS:


- Red wire terminal - Input +
- Black wire terminal - Input -

TECHNICAL CHARACTERISTICS

- 8" Speaker
- Impedance: 8 Ohm
- Rated power: 15 W RMS
- Maximum power: 25 W
- Resonance frequency: 75 Hz.
- Frequency response: 90 Hz – 12kHz (-3dB)
- Sound Pressure Level: 90 db/ 1W, 1m.
- Flush-mount hole diameter: 235 mm.
- Dimensions: \varnothing 245 x 90
- Weight: 780 grams


INSTALLATION DETAIL

Installation on false ceilings or panels: Fig. A




Make a 230 mm. diameter circular hole to flush-mount the speaker.
Before inserting the speaker, connect it.
To insert it, turn the four screws of the clamps to the left until the speaker assembly enters the aforementioned hole

Installation in flush-mount box: Fig. B

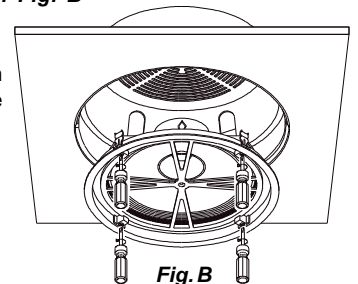

Once the connection has been made, insert the speaker into the flush-mount box P4903.

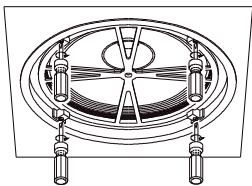

Press into its housing and tighten the four precious screws at the same time so that the clamps open and the Diffuser is thus secured (Try to tighten each of them equally).

Fitting grille Mod. P4951 – P4952 and P4953

Screw the Grille with the Ring through the hole in the centre of both until the end of the thread. To finish fit the cap to hide the screw.

