


4FA020601

2 WAY PASSIVE CABINET LOUDSPEAKER - P7375



1.- 2 ½" moveable speaker 2.- Connection terminals

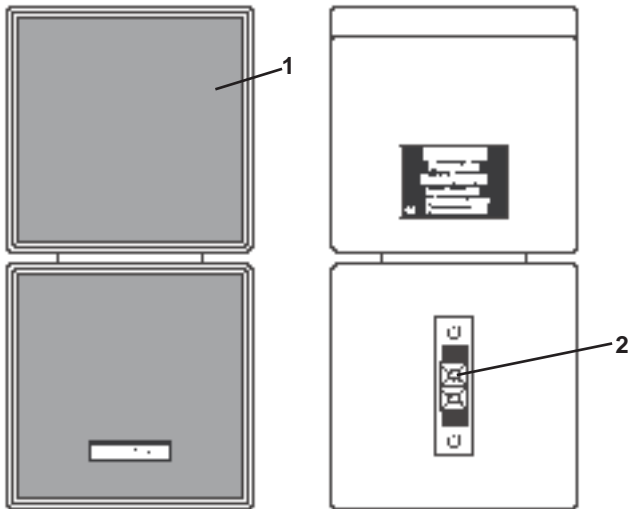

DESCRIPTION

2-way loudspeaker, 8 Ohm/35 W (50 W.max.) with two 2 ½ " speakers.

It has built-in pressure terminals for simple connection.

It is provided with a moveable support to fasten it to the wall, to the ceiling or standing.

Finish in black (Mod. P7375-09).


INSTALLATION

The ideal location for the baffles depends on the size, shape and decoration of the room.

The best stereo effect is obtained when the baffles are separated 2 to 4 metres from each other and are placed at ear height.

It is included a moveable support to fasten it to the wall, to the ceiling or standing.

Support installation:

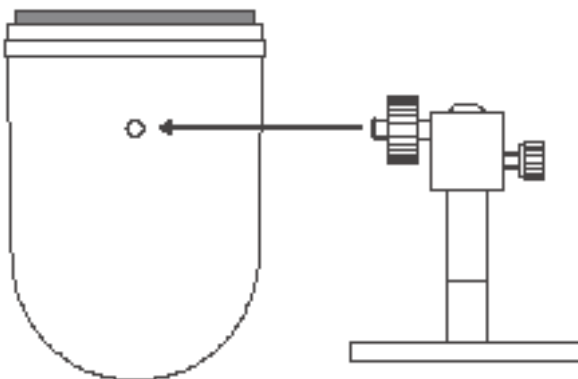

Note: The speakers are "magnetically shielded" but if you place them next to a TV set, and this produces a certain effect on the colour purity, separate them slightly.

CONNECTION

Before making the connection, make sure that the amplifier supplying the audio signal is off.

After putting the speakers into place prepare the cables according to desired measurement and make the connection.

Terminals :

RED: Input+

BLACK: Input-

TECHNICAL CHARACTERISTICS

- 2-way speaker
- Two 2½" moveable speakers
- Rated power: 35 W RMS (50 W max.)
- Rated impedance: 8 Ohm.
- Frequency response: 250 Hz – 15 KHz
- Sensitivity (1W/1m): 88 ±3 dB.
- Dimensions: 83 x 172 x 115 mm. (Width x Height x Depth)
- Weight: 1.070 gr.